


2300 Series

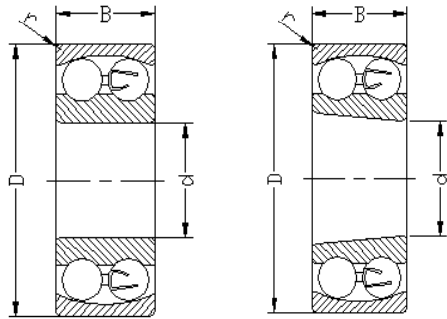

Cylindrical Bore

Tapered Bore

Dimensions (mm)				Load Ratings (N)		Limiting Speeds (rev/min)		Weight kg	Bearing Code	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i>	<i>C_r</i>	<i>C_{or}</i>	<i>Grease</i>	<i>Oil</i>		<i>Cylindrical Bore</i>	<i>Tapered Bore</i>
20	52	21	1.1	17600	4250	16000	15600	0.226	2304	2304 K
25	62	24	1.1	25000	6500	13000	13500	0.335	2305	2305 K
30	72	27	1.1	32500	8700	10000	11900	0.611	2306	2306 K
35	80	31	1.5	40500	11100	9000	11200	0.675	2307	2307 K
40	90	33	1.5	46000	13400	8000	10000	0.925	2308	2308 K
45	100	36	1.5	55000	16500	7000	9300	1.231	2309	2309 K
50	110	40	2.0	66000	19900	6300	8800	1.599	2310	2310 K
55	120	43	2.0	77000	23800	5600	8200	2.058	2311	2311 K
60	130	46	2.1	89000	28000	5000	7800	2.735	2312	2312 K